




b.o.b. Sistemi Idraulici S.p.A.

**unilift**<sup>®</sup>

COMPANY  
WITH QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001/2000 =

## HOOKLIFT « T 14/6 »

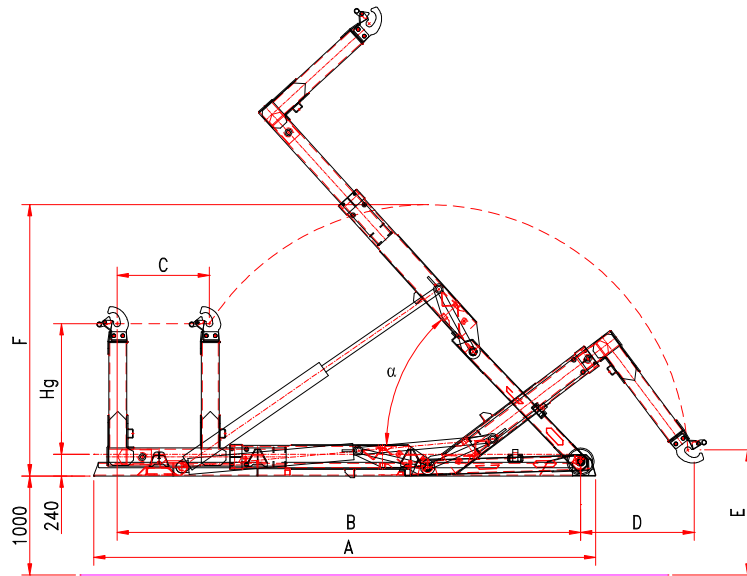

Mod.	HG	A	B	C	D	E	F	G	Weight	a	Container	min.	max.
T 14/6 N	1.430/1.570	5.580	5.200	1.032	1.270	1.240	3.000	2.850	2.150 kg	49°		4.600	6.100
T 14/6 NL	1.430/1.570	5.780	5.400	1.032	1.070	1.240	3.000	3.000	2.200 kg	46°		4.800	6.300
T 14/6 L	1.430/1.570	5.980	5.600	1.032	870	1.240	3.000	3.150	2.250 kg	44°	5.000	6.500	

### FEATURES

Lifting capacity: tons 20  
 Max. operating pressure Mpa 28 (sealed relief valve)  
 Recommended max. oil flow l/min 90  
 With flow control SDS 150 Walvoil  
 Operating times: with 64 lt/min pump  
 Tipping / unloading: 43 sec.  
 Loading time: 36 sec.  
 Horizontal movement (sliding arm): mm 1032  
 Free tunnel height: mm 110  
 Container support level from chassis  
 (installation height): mm 240

### SECURITIES

Bolted hook with mechanical security  
 Mechanical tipping security (counter-hooks)  
 Hydraulic tipping interlock security on  
 telescopic arm and container hydraulic locking

### KIT ENDOWMENT

Pneumatic cab controls  
 Ground manual flow control levers  
 Oil tank capacity: front 110 / lateral 160 l  
 Adhesive stickers and labels

### DOCUMENTS

Mounting instruction manual and spare parts  
 Warranty forms  
 CE certification

### OPTIONS

Operating times: with 84 lt/min pump  
 Tipping / unloading: 33 sec  
 Loading time: 27 sec  
 Additional flow control element (for stabilizer)  
 Heavy duty rear foldable / vertical stabilizer  
 Risen arm monitoring LED (integrated in main  
 cylinders interlock valve)  
 Container hydraulic locking monitoring LED  
 Pneumatic hook security  
 Radio control

\*Weight: basic hooklift weight without kit and options

The technical details shown in this sheet are indicative and can be changed by the builder without prior notice

**B.O.B. Sistemi Idraulici S.p.A.** – Regione Oltre Rea, 61 – 12060 Monchiero (CN) - Italia  
 P. I.V.A. 00496180043 - Tel.: +39 (0173) 780002/3 – Fax: +39 (0173) 780004  
 Internet: [www.bobspa.com](http://www.bobspa.com) - E-mail: [info@bobitalev.com](mailto:info@bobitalev.com)